



MIL-DTL-38999 Series III

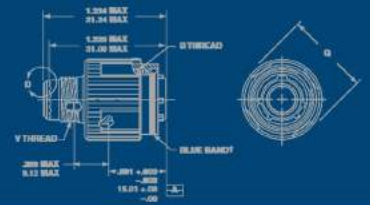

Renhotec Group Limited

Circular Connectors

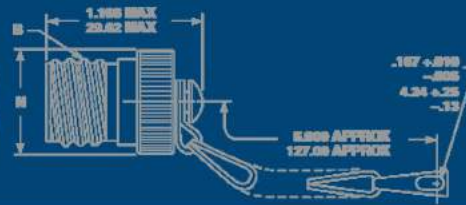

How To Order

Contact Type


- P-Male Contact
- S-Female Contact
- PL-Long DIP Pin
- PC-Short DIP Pin
- SL-Long DIP Socket
- SC-Short DIP Socket

Shell Type

- Square Flange Receptacle-20
- Jam-nut Mounting Receptacle-24
- Plug-26

Shell Size

- A-B-C-D-E-F-G-H-J
- (For 9-11-13-15-17-19-21-23-25)



Model Of Designation

Finish

- Olive Drab Cadmium-W
- Electroless Nickel Aluminum-F
- Passivated Stainless Steel-K
- Durmalon Plated-T
- Stainless Steel W/ Nickel Plate-L
- Composite+W-J
- Composite+F -M


Arrangements
(See Page)


Key Orientation

- N-Normal
- ABCDE-Alternative
(See Page)

Plug


Sealed receptacles

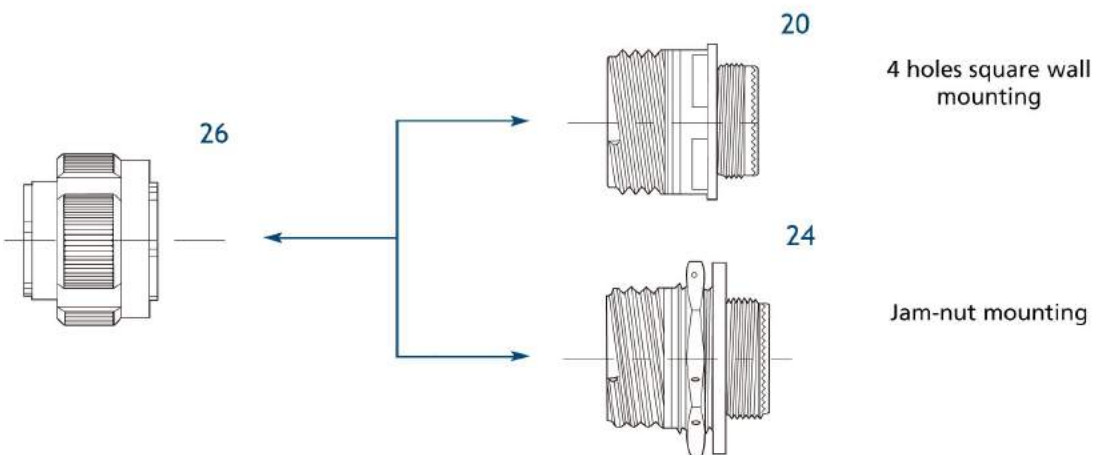

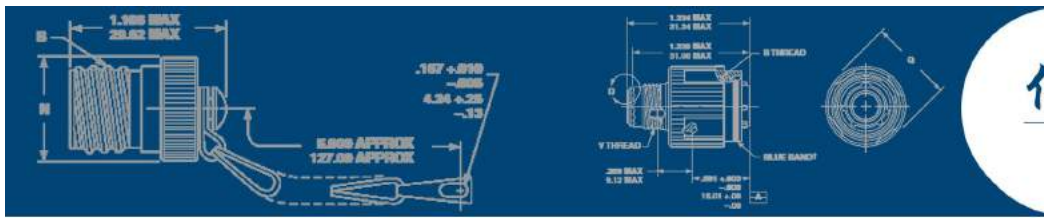


Size for Back Shell

Back nut (M85049/14)

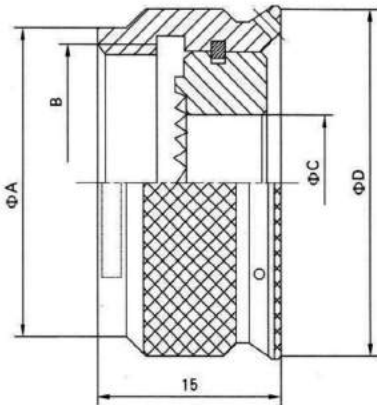


Shell No.	A	Thread B	C	D
09	15.2	M12*1	6.7	18.0
11	18.2	M15*1	9.9	21.0
13	21.2	M18*1	12.8	24.0
15	25.1	M22*1	16.0	28.0
17	28.1	M25*1	19.2	31.0
19	31.1	M28*1	21.4	34.0
21	34.0	M31*1	24.6	37.0
23	37.0	M34*1	27.7	40.0
25	40.0	M37*1	30.9	43.0

Shielding back shell (M85049/20)


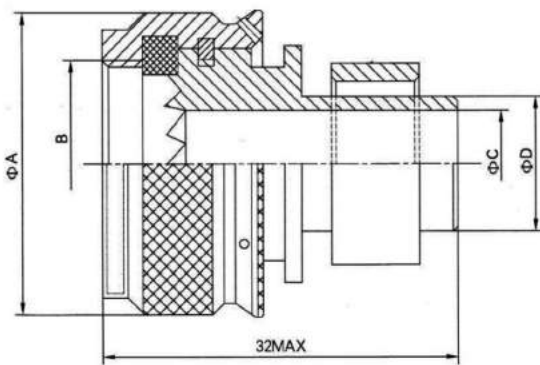


Shell	A	Thread B	C	D
0	18.	M12*1	6.5	8.8
1	21.	M15*1	8.6	12.65
1	24.	M18*1	10.90	12.95
1	28.	M22*1	14.10	16.00
1	31.	M25*1	17.25	19.30
1	34.	M28*1	20.40	22.61
2	37.	M31*1	23.60	25.65
2	40.	M34*1	26.40	28.70
2	43.	M37*1	28.40	30.53


Heat shrinkable sleeve (M85049/69)

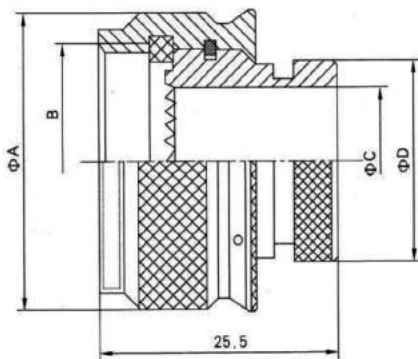

Shell No.	A	Thread B	C	D
09	18.0	M12*1	6.	13.5
11	21.0	M15*1	9.	15.3
13	24.0	M18*1	12.8	19.6
15	28.0	M22*1	16.0	21.2
17	31.0	M25*1	19.2	24.4
19	34.0	M28*1	21.4	26.4
21	37.0	M31*1	24.6	30.9
23	40.0	M34*1	27.7	34.4
25	43.0	M37*1	30.9	36.6

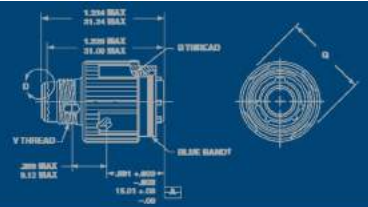
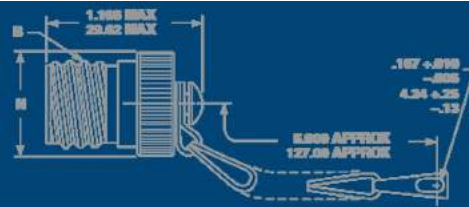


Protecting cable by spring (M85049/06)

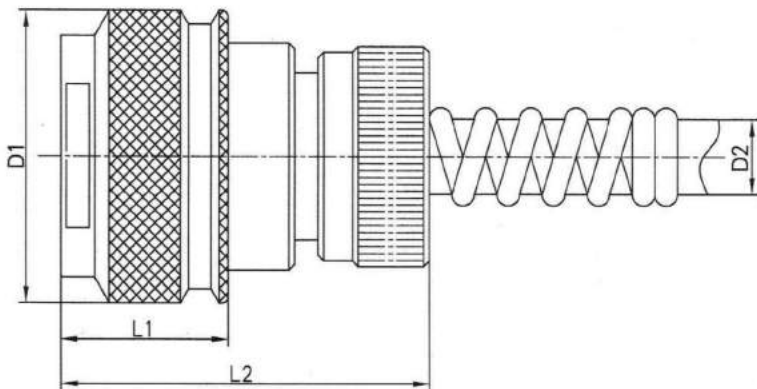


P/	D1	D2	L1	L2
M85049 01-09N	18.0	7.0	14.8	37.0
M85049 01-11N	21.0	10.0	14.8	37.0
M85049 01-13N	24.0	13.0	14.8	37.0
M85049 01-15N	28.0	15.0	14.8	40.0
M85049 01-17N	31.0	18.0	14.8	40.0
M85049 01-19N	34.0	20.0	14.8	40.0
M85049 01-21N	37.0	23.5	14.8	45.0
M85049 01-23N	40.0	26.5	14.8	45.0
M85049 01-25N	43.0	29.0	14.8	45.0

Straight cable clamp (M85049/38-NB)

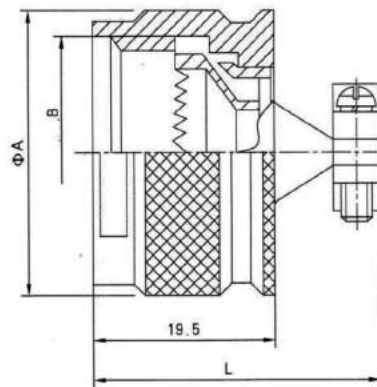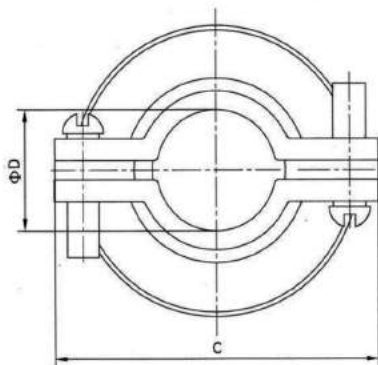


P/	A	Thread	C	D (min)	D (max)	L
M85049 38-09N	16.4	M12*1	18.6	3.	5.	29.2
M85049 38-11N	19.2	M15*1	20.6	5.	7.	29.2
M85049 38-13N	23.0	M18*1	24.5	7.	11.	29.2
M85049 38-15N	25.7	M22*1	26.0	9.	12.9	29.8
M85049 38-17N	29.0	M25*1	33.0	12.8	17.0	31.0
M85049 38-19N	31.5	M28*1	36.3	13.2	17.9	32.0
M85049 38-21N	34.7	M31*1	39.0	14.8	21.1	32.0
M85049 38-23N	37.5	M34*1	41.4	16.4	24.3	32.0
M85049 38-25N	41.0	M37*1	44.5	18.0	27.5	32.0

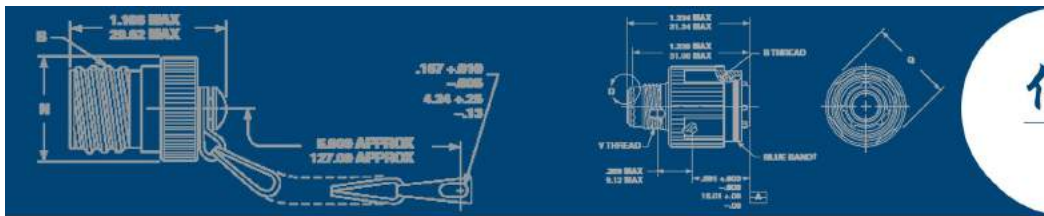


仁昊伟业
Renhotec

90° elbow cable clamp (M85049/16)


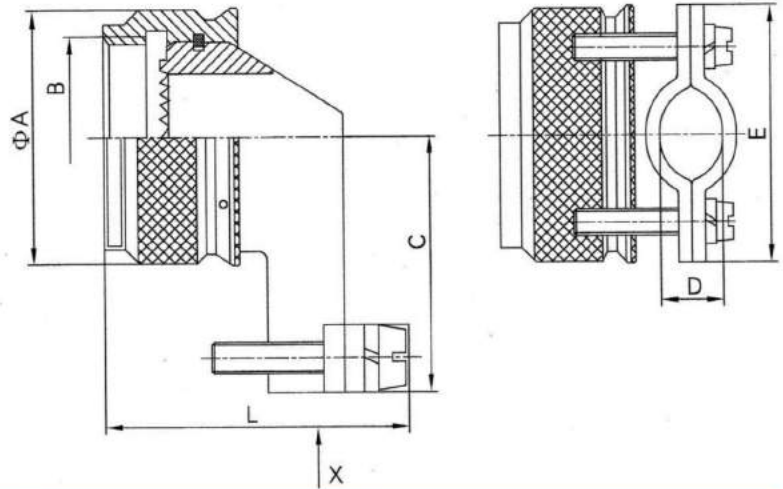


Shell	A	Thread B	C (max)	D (min)	D (max)	E (max)	L (max)
0	19.0	M12*1	20.0	2.85	6.71	21.0	25.9
1	22.0	M15*1	21.5	6.00	9.96	26.5	29.2
1	25.1	M18*1	23.0	8.45	12.85	31.5	32.0
1	29.0	M22*1	25.0	12.00	16.03	36.5	35.2
1	32.1	M25*1	27.0	11.10	19.20	31.0	36.4
1	35.1	M28*1	28.5	13.75	21.46	37.0	40.7
2	38.1	M31*1	29.5	19.30	24.64	35.0	43.8
2	41.1	M34*1	31.0	21.40	27.81	35.0	43.0
2	44.1	M37*1	33.0	23.50	30.99	37.0	44.2


Earthing and impaction (M85049/01)

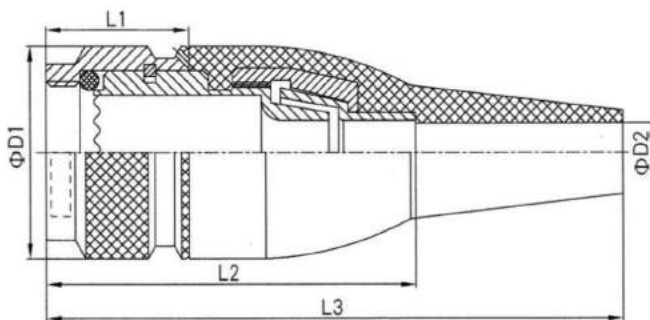

P/N	D1	D2	L1	L2	L3
M85049 01-08N	18.0	7.0	14.8	37.0	53.0
M85049 01-10N	21.0	10.0	14.8	37.0	53.0
M85049 01-12N	24.0	13.0	14.8	37.0	53.0
M85049 01-14N	28.0	15.0	14.8	40.0	73.0
M85049 01-16N	31.0	18.0	14.8	40.0	73.0
M85049 01-18N	34.0	20.0	14.8	40.0	73.0
M85049 01-20N	37.0	23.5	14.8	45.0	73.0
M85049 01-22N	40.0	26.5	14.8	45.0	73.0
M85049 01-24N	43.0	29.0	14.8	45.0	73.0

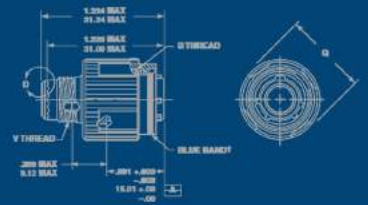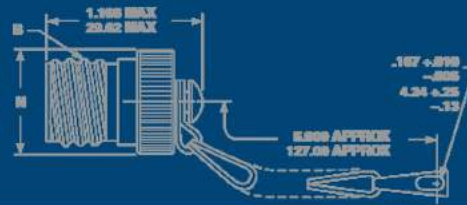


Straight cable clamp (M85049/38)


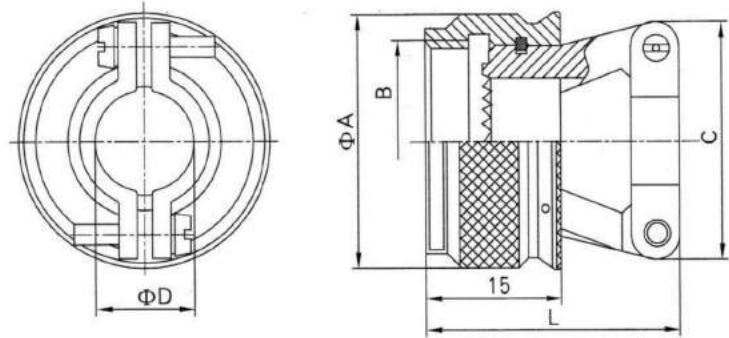


Shell	A (max)	Thread B	C (max)	D (min)	D (max)	L (max)
0	18.0	M12*1	20.0	2.49	5.94	27.0
1	21.0	M15*1	21.0	3.87	5.94	28.5
1	24.0	M18*1	23.4	4.83	8.33	30.0
1	28.0	M22*1	26.6	6.60	11.61	31.5
1	31.0	M25*1	30.6	7.19	15.60	33.5
1	34.0	M28*1	34.0	8.26	16.10	36.6
2	37.0	M31*1	35.8	8.71	17.73	39.8
2	40.0	M34*1	39.0	9.68	20.90	42.9
2	43.0	M37*1	40.6	10.62	21.66	45.0


90° elbow cable clamp with shielding (M85049/39)

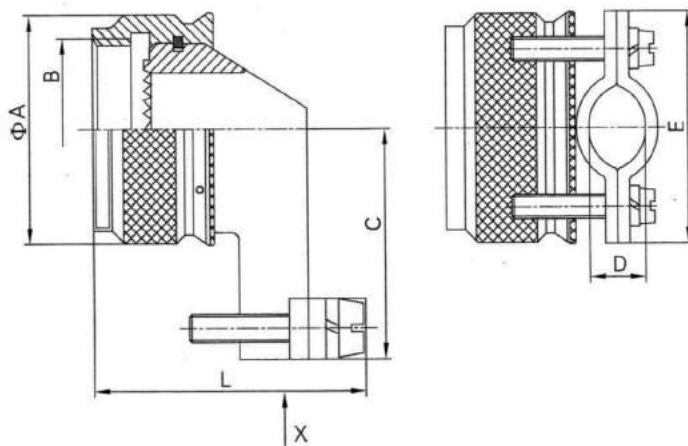

Shell No.	A	Thread	C	D (min)	D (max)	E (max)	L (max)
09	18.0	M12*1	20.6	2.49	5.94	21.6	29.5
1	21.0	M15*1	22.0	3.87	5.94	22.8	29.5
13	24.0	M18*1	23.6	4.83	8.33	26.0	31.9
15	28.0	M22*1	25.2	6.60	11.61	29.0	35.1
17	31.0	M25*1	26.8	7.19	15.61	30.6	39.1
19	34.0	M28*1	31.3	8.26	16.10	37.0	41.5
21	37.0	M31*1	32.9	8.71	17.73	39.0	43.3
23	40.0	M34*1	34.5	9.68	20.90	41.0	46.5
25	43.0	M37*1	36.1	10.62	21.66	42.0	47.1

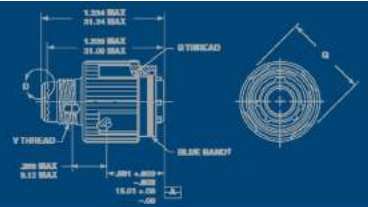
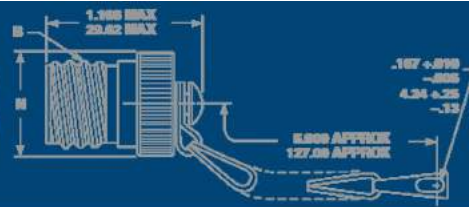


Protecting cable by spring (M85049/06)


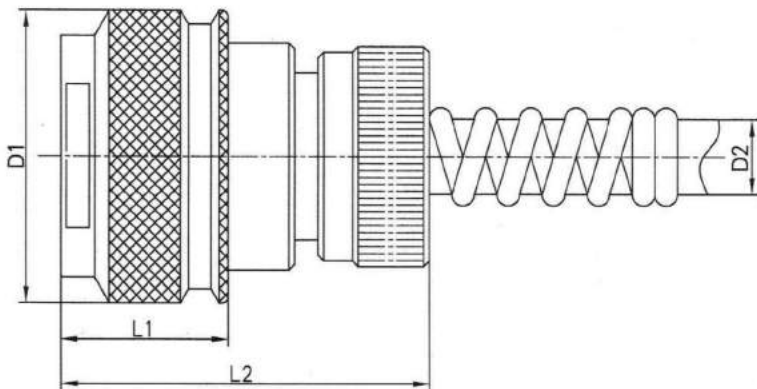


P/	D1	D2	L1	L2
M85049 01-09N	18.0	7.0	14.8	37.0
M85049 01-11N	21.0	10.0	14.8	37.0
M85049 01-13N	24.0	13.0	14.8	37.0
M85049 01-15N	28.0	15.0	14.8	40.0
M85049 01-17N	31.0	18.0	14.8	40.0
M85049 01-19N	34.0	20.0	14.8	40.0
M85049 01-21N	37.0	23.5	14.8	45.0
M85049 01-23N	40.0	26.5	14.8	45.0
M85049 01-25N	43.0	29.0	14.8	45.0

Straight cable clamp (M85049/38-NB)

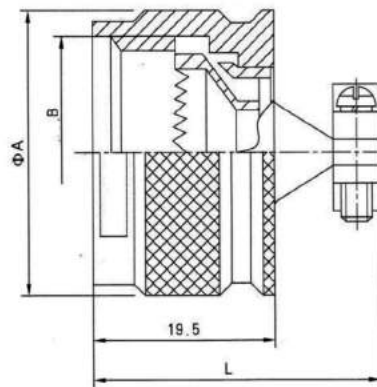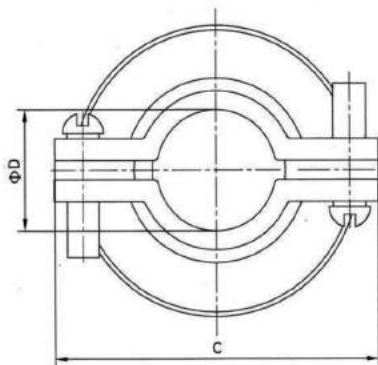


P/	A	Thread	C	D (min)	D (max)	L
M85049 38-09N	16.4	M12*1	18.6	3.	5.	29.2
M85049 38-11N	19.2	M15*1	20.6	5.	7.	29.2
M85049 38-13N	23.0	M18*1	24.5	7.	11.	29.2
M85049 38-15N	25.7	M22*1	26.0	9.	12.9	29.8
M85049 38-17N	29.0	M25*1	33.0	12.8	17.0	31.0
M85049 38-19N	31.5	M28*1	36.3	13.2	17.9	32.0
M85049 38-21N	34.7	M31*1	39.0	14.8	21.1	32.0
M85049 38-23N	37.5	M34*1	41.4	16.4	24.3	32.0
M85049 38-25N	41.0	M37*1	44.5	18.0	27.5	32.0

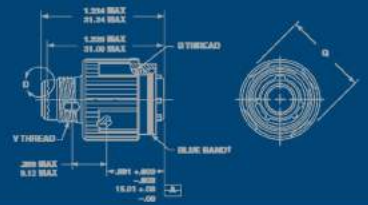
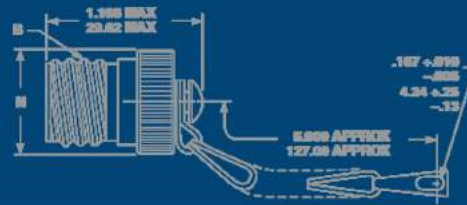


P/	A	Thread B	C	D
M85049 20-09J	21.8	M12*1	6.73	12.65
M85049 20-11J	25.0	M15*1	8.71	12.95
M85049 20-13J	29.5	M18*1	11.10	16.00
M85049 20-15J	32.5	M22*1	14.27	19.30
M85049 20-17J	35.5	M25*1	17.45	22.61
M85049 20-19J	38.5	M28*1	20.62	25.65
M85049 20-21J	41.5	M31*1	23.80	28.70
M85049 20-23J	45.0	M34*1	26.57	30.53
M85049 20-25J	48.0	M37*1	28.58	34.52



Straight cable clamp (M85049/91-J)

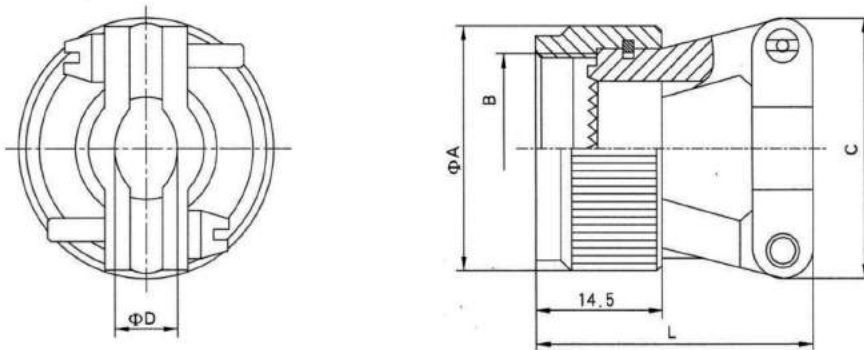

Shell No.	A (max)	Thread B	C (max)	D (min)	D (max)	L (max)
0	21.8	M12*1	20.0	4.00	5.94	27.0
1	25.0	M15*1	20.0	4.00	5.94	28.5
1	29.5	M18*1	23.4	4.83	8.33	30.0
1	32.5	M22*1	26.6	6.60	11.61	31.5
1	35.5	M25*1	30.6	7.19	15.60	33.5
1	38.5	M28*1	34.0	8.26	16.10	36.6
2	41.5	M31*1	35.8	8.71	17.73	39.8
2	45.0	M34*1	39.0	9.68	20.90	42.9
2	48.0	M37*1	40.6	10.62	21.66	45.0


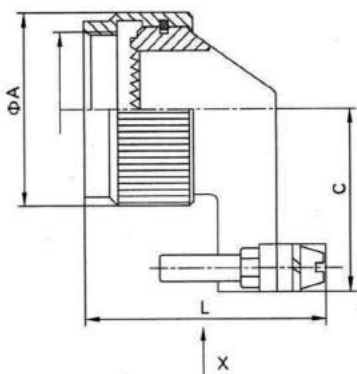


90° elbow cable clamp (M85049/92-J)

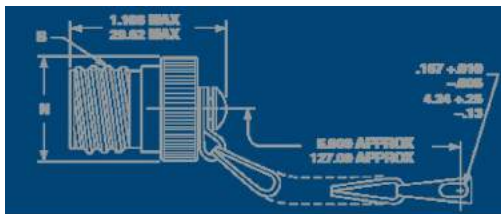

仁昊伟业
Renhotec

Shell No.	A (max)	Thread B	C (max)	D (min)	D (max)	L (max)
09	21.8	M12*1	20.6	2.49	5.94	29.5
11	25.0	M15*1	22.0	3.87	5.94	29.5
13	29.5	M18*1	23.6	4.83	8.33	31.9
15	32.5	M22*1	25.2	6.60	11.61	35.1
17	35.5	M25*1	26.8	7.19	15.60	39.1
19	38.5	M28*1	31.3	8.26	16.10	41.5
21	41.5	M31*1	32.9	8.71	17.73	43.3
23	45.0	M34*1	34.5	9.68	20.90	46.5
25	48.0	M37*1	36.1	10.62	21.66	47.1

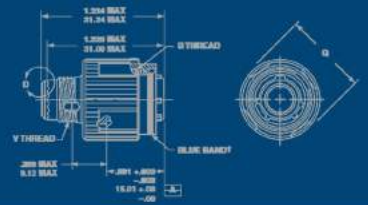
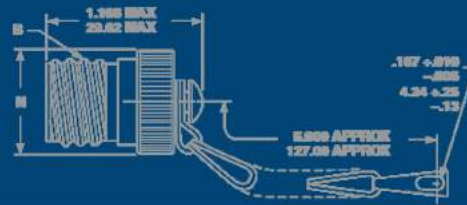


Dust Cap of Plug and Receptacle



Part Number

	D38999/	32	F	09	N
Basic series					
32 = Dust cap of plug					
33 = Dust cap of receptacle					
Finish					
W = Olive green cadmium plating					
F = Electroless nickel plating					
J = Olive green cadmium plating (composite material)					
M = Electroless nickel plating (composite material)					
Shell size					
09, 11, 13, 15, 17, 19, 21, 23, 25					
Chain type					
N = Stainless steel rope with ring					
R = Stainless steel rope with hole					



Dust cap for plug

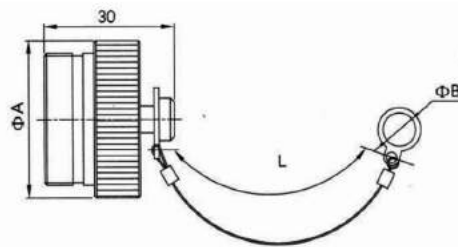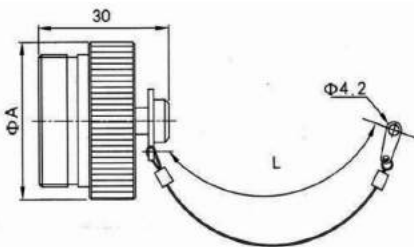


Dust cap for receptacle

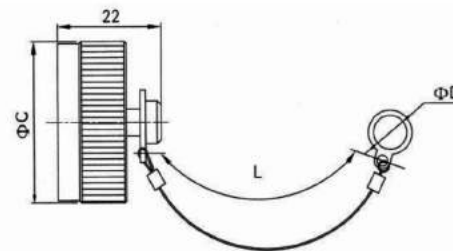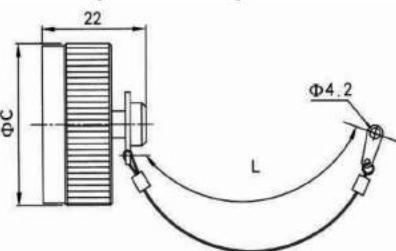

Shell No.		09	11	13	15	17	19	21	23	25
A	Max	22.86	25.40	30.48	33.02	36.83	39.37	43.18	44.45	48.26
B	Min	12.92	17.78	19.27	22.60	25.62	28.95	31.97	34.03	38.32
C	Max	22.86	27.86	30.48	31.75	36.83	38.10	41.91	44.45	48.26
D	Min	17.78	21.33	25.62	28.95	31.97	35.30	38.32	41.65	44.45
L	Max	127.00	127.00	127.00	127.00	127.00	127.00	127.00	127.00	127.00

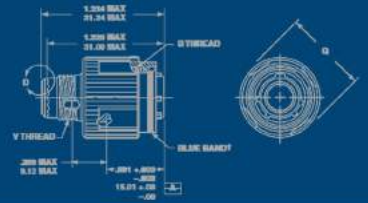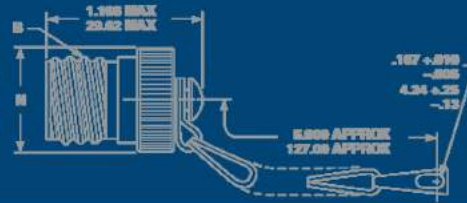


Plug (D38999/26)

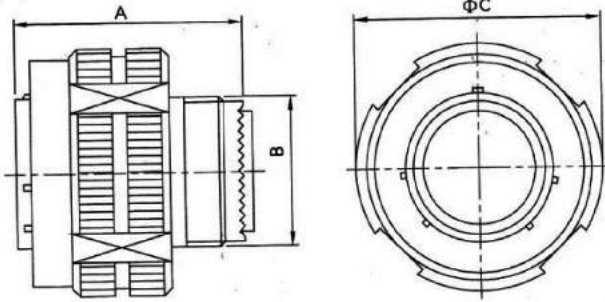


Shell Size	A (max)	B Thread	C (max)
09	31.00	M12*1-6g	21.80
11	31.00	M15*1-6g	25.00
13	31.00	M18*1-6g	29.40
15	31.00	M22*1-6g	32.40
17	31.00	M25*1-6g	35.60
19	31.00	M28*1-6g	38.50
21	31.00	M31*1-6g	41.70
23	31.00	M34*1-6g	44.90
25	31.00	M37*1-6g	48.00

Square Flange Receptacle (D38999/20)

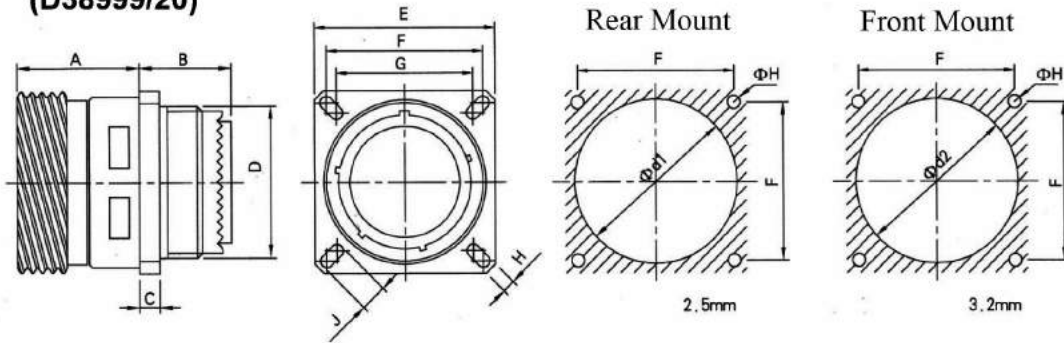


Panel Thickness(max) 2.5mm Panel Thickness(max) 3.2mm

Shell Size	A (max)	B (max)	C (max)	D Thread	E	F	G	H	J	d1 (min)	d2 (min)
09	20.90	10.60	2.50	M12*1-6g	23.80	18.26	15.09	3.25	5.49	16.66	13.11
11	20.90	10.60	2.50	M15*1-6g	26.20	20.62	18.26	3.25	4.93	20.22	15.88
13	20.90	10.60	2.50	M18*1-6g	28.60	23.01	20.62	3.25	4.93	23.42	19.05
15	20.90	10.60	2.50	M22*1-6g	31.00	24.61	23.01	3.25	4.39	26.59	23.01
17	20.90	10.60	2.50	M25*1-6g	33.30	26.97	24.61	3.25	4.93	30.96	25.81
19	20.90	10.60	2.50	M28*1-6g	36.50	29.36	26.97	3.25	4.93	32.94	28.98
21	20.10	11.40	3.20	M31*1-6g	39.70	31.75	29.36	3.25	4.93	36.12	32.16
23	20.10	11.40	3.20	M34*1-6g	42.90	34.93	31.75	3.91	6.15	39.29	34.93
25	20.10	11.40	3.20	M37*1-6g	46.00	38.10	34.93	3.91	6.15	42.47	37.69

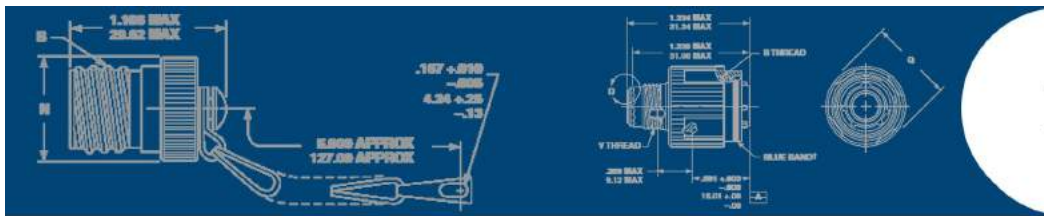


Jam-nut Mounting Receptacle (D38999/24)

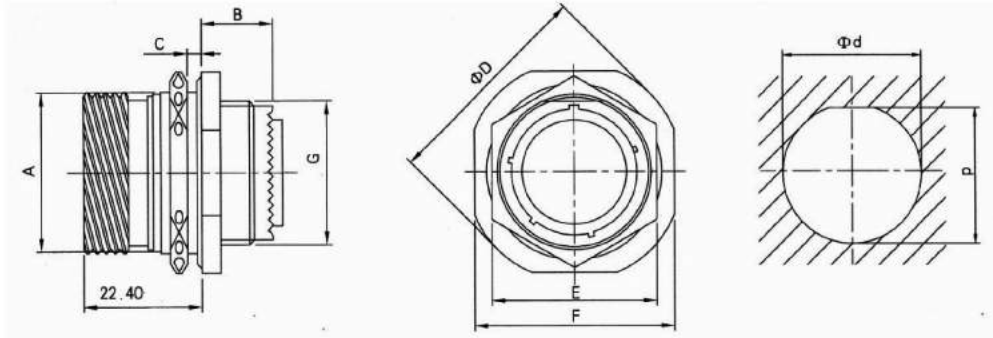


Shell Size	A	B (max)	C (max)	D (max)	E (max)	F	G	Thread	d	p
09	16.50	9.90	3.20	30.50	24.00	27.00	M12*1-6g	17.70	16.99	
11	19.30	9.90	3.20	35.20	27.00	31.80	M15*1-6g	20.88	19.53	
13	24.00	9.90	3.20	38.40	32.00	34.90	M18*1-6g	25.58	24.26	
15	27.20	9.90	3.20	41.60	36.00	38.10	M22*1-6g	28.80	27.53	
17	30.40	9.90	3.20	44.80	37.00	41.30	M25*1-6g	31.98	30.68	
19	33.40	9.90	3.20	49.30	41.00	46.00	M28*1-6g	35.15	33.86	
21	36.50	9.90	3.20	52.70	46.00	49.20	M31*1-6g	38.28	37.06	
23	39.70	9.90	3.20	55.90	50.00	52.40	M34*1-6g	41.50	40.24	
25	42.80	9.90	3.20	59.00	51.23	55.60	M37*1-6g	44.68	43.41	


Receptacle, Thru-hole Type

Jam-nut Mounting Receptacle
(D38999/24)

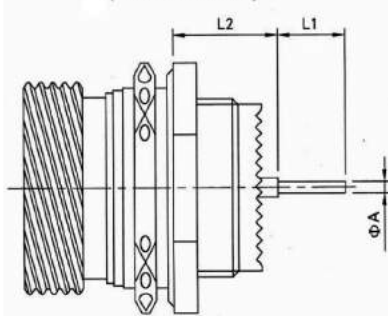



Square Flange Receptacle
(D38999/20)

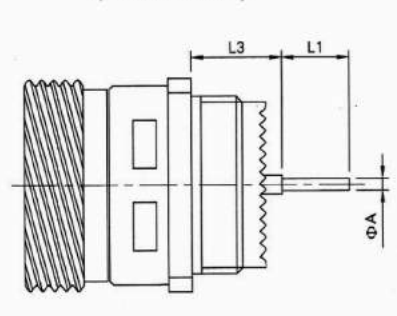

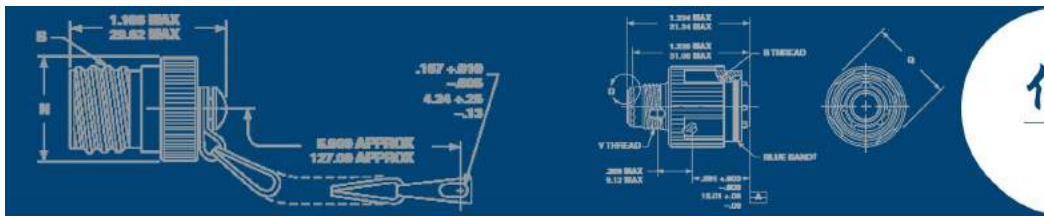



Thru-hole Contacts		L1	A
22D [#]	Long Thru-hole Contacts	8.5	0.7
	Short Thru-hole Contacts	4.0	
20 [#]	Long Thru-hole Contacts	8.5	0.7
	Short Thru-hole Contacts	5.1	
16 [#]	Long Thru-hole Contacts	8.5	1.15
	Short Thru-hole Contacts	5.1	

Dimension with Different Contacts			Shell Size	Shell Size
			09, 11	13, 15, 17, 19, 21, 23, 25
L2	22D [#] Pin	min	10.52	10.34
		max	11.46	11.28
	22D [#] Socket	min	10.19	10.01
		max	11.46	11.28
	16 [#] / 20 [#] Pin, Socket	min	10.69	10.51
		max	11.63	11.45
L3	22D [#] Pin	min	9.48	9.48
		max	10.58	10.58
	22D [#] Socket	min	9.15	9.15
		max	10.58	10.58
	16 [#] / 20 [#] Pin, Socket	min	9.65	9.65
		max	10.75	10.75

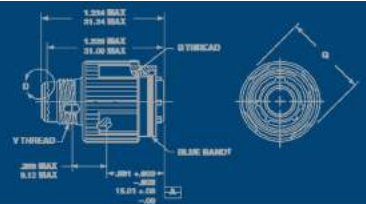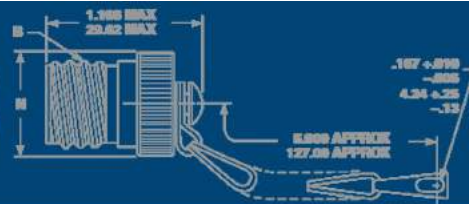


Insert Availability

Shell Size- Inser Arrg	Military Shell Size Code	Service Rating	Total Contacts	Contact Size						
				22D	20	16	12	10	8	
09-35		M	5	5						
09-98		I	3				3			
11-35		M	13	13						
11-98		I	6		6					
11-05		I	5		5					
11-04		I	4		4					
11-01		I	1				1			
11-99		I	7		7					
11-02		I	2			2				
13-35		M	22	22						
13-98		I	10		10					
13-04		I	4			4				
13-08		I	8		8					
13-50		M	5		4			1		
13-60		I	6		2	4				
15-35		M	37	37						
15-19		I	19		19					
15-18		I	18		18					
15-05		II	5			5				
15-97		II	12		8	4				
15-15		I	15		14	1				
17-35	E-35	M	55	55						
17-26	E-26	I	26		26					
17-06	E-6	I	6				6			
17-08	E-8	II	8			8				
17-99	E-99	II	23		21	2				
19-35	F-35	M	66	66						
19-32	F-32	I	32		32					
19-28		I	28		26	2				
19-11	F-11	II	11			11				
19-30		II	30		29	1				
19-45		M	45	45						

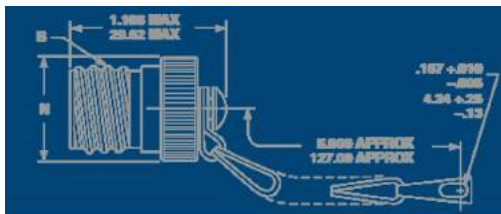

Insert Availability

Shell Size- Inser Arrg	Military Shell Size Code	Service Rating	Total Contacts	Contact Size					
				22D	20	16	12	10	8
19-18		M	18	14					4
19-05			5		1			4	
19-93		I	32	24	6			2	
21-35	G-35	M	79	79					
21-41	G-41	I	41		41				
21-16	G-16	II	16			16			
21-39	G-39	I	39		37	2			
21-11	G-11	II	11				11		
21-27		I	27		27				
21-25		I	25		25				
21-24		I	24		24				
23-35	H-35	M	100	100					
23-55	H-55	I	55		55				
23-53	H-53	I	53		53				
23-36		I	36		36				
23-34		I	34		34				
23-32		I	32		32				
23-21	H-21	II	21			21			
23-97		I	16			16			
23-99		II	11			11			
25-35	J-35	M	128	128					
25-02		I	100	100					
25-61	J-61	I	61		61				
25-29		I	29		29				
25-24	J-24	I	24			12	12		
25-43	J-43	I	43		23	20			
25-19	J-19	I	19				19		
25-04	J-4	I	56		48	8			
25-11			11		2			9	
25-93		M	118	109		8		1	

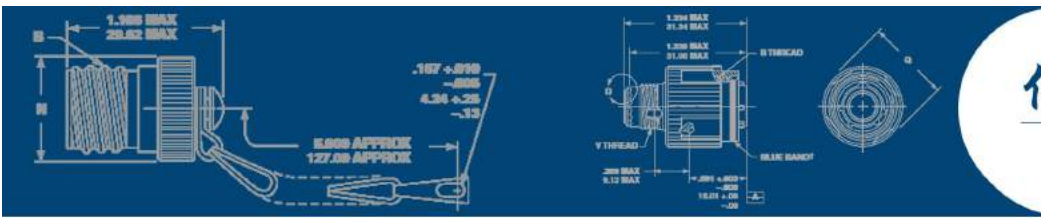


Contact Arrangement




09-35 M




09-98 I




11-35 M




11-98 I




11-05 I




11-04 I



11-01 I




11-99 I




11-02 I




13-35 M




13-98 I




13-04 I



13-08 I




13-50 M




13-60 I




15-35 M




15-19 I




15-18 I




15-05 II




15-97 I




15-15 I




17-35 M




17-26 I




17-06 I




17-08 II




17-99 I




19-35 M




19-32 I




19-28 I




19-11 II




19-30 I




19-45 M






19-18 M




19-05




19-93 I

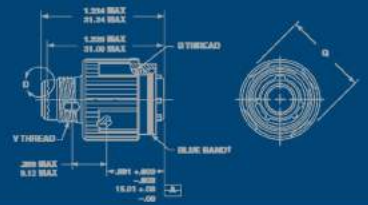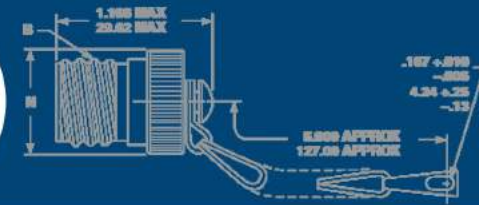


21-35 M




21-41 I




21-16 II




21-39 I




21-11 II




21-27 I




21-25 I




21-24 I




23-35 M




23-55 I




23-53 I




23-36 I




23-34 I




23-32 I




23-21 II




23-97 I




23-99 II




25-35 M




25-02 I




25-61 I




25-29 I




25-24 I




25-43 I




25-19 I



25-04 I





25-11



25-93 M

○ 22D# ● 20# ◐ 16# ◑ 12# ⊙ 10# ● 8#

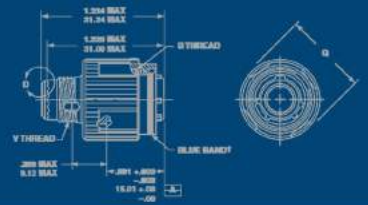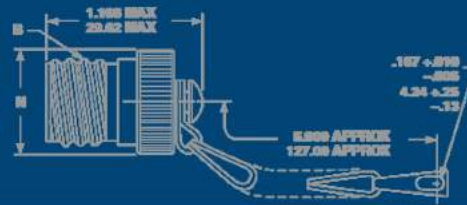

Technical Characteristics

Mechanical

Shell	Material	Sealed version	: Aluminium alloy, Composite
	Plating	Hermetic version	: Stainless steel
RFI ring	Material		: Beryllium copper
	Plating		: Nickel/cadmium
Insert	Material	Sealed version	: Thermoplastic and fluorinated silicone elastomer
		Hermetic version	: Sintered glass insert
Flat gasket and 'o'ring	Material		: Fluoronited silicone elastomer
Contacts	Material	Sealed version	: Copper alloy
	Plating	Hermetic version	: Ferrous alloy
Retention	Type	Sealed version	: Crimp type or pcb (consult us)
		Hermetic version	: Solder type or pcb (consult us)
		Size 22 D	: 4,5 N
		Size 20	: 6,7 N
		Size 16	: 11,1 N
Vibrations			: As per MIL-DTL-38999
Physical shocks			: 300 g, 3 ms in the 3 axes
Durability			: 500 coupling and uncoupling cycles

Environmental conditions

Service temperature	Sealed version	: Cadmium plating - 65° C to + 175° C
	Hermetic version	: Nickel plating - 65° C to + 200° C
		: Passived plating - 65° C to + 200° C
Thermal shocks		: As per MIL-DTL-38999
Sealing		: Leakage ≤ 16 cm ³ /h on mated connecting under 2.1 bars
Air leakage	Hermetic version	: ≤ 1.10·10 ⁻⁶ mbar. l/s under 1 bar vacuum
Salt spray resistance	Sealed version	: 500 hours class W and K, as per MIL-DTL-38999
		: 48 hours class F and L, as per MIL-DTL-38999

Electrical

Withstanding voltage	At sea level	: Service M : 1300 V	
	At 70 000 ft altitude	: Service I : 1800 V	
		: Service II : 2300 V	Service N : 1000 V
		: Mated connector	Unmated connector
		: Service M : 800 V	Service M : 200 V
		: Service I : 1000 V	Service I : 200 V
		: Service II : 1000 V	Service II : 200 V
Insulation resistance		: ≥ 5000 MΩ to 25° C and 65 % HR max.	
Voltage drop		: Size 22 : test to 5 Amp. = 73 millivolts max.	
		: Size 20 : test to 7,5 Amp. = 55 millivolts max.	
		: Size 16 : test to 13 Amp. = 49 millivolts max.	
		: Size 12 : test to 23 Amp. = 42 millivolts max.	
		: Size 8 : test to 46 Amp. = 26 millivolts max.	
Shielding		: As per MIL-DTL-38999	

Size	Contacts current		Diameter over insulation sheath in mm	Permitted wire Section in mm ²
	Sealed version	Hermetic version		
22	5 A	3 A	0,76 to 1,37	0,095 to 0,38
20	7,5 A	5 A	1,01 to 2,10	0,21 to 0,60
16	13 A	10 A	1,65 to 2,77	0,60 to 1,34
12	23 A	17 A	2,46 to 3,61	1,91 to 3,18
8	46 A	40 A	4,50 to 5,80	5,30 to 8,98